


2. 产品图纸 (Product Drawings)

? RoHS ? HF ? REACH

正面图

侧面图

背面图

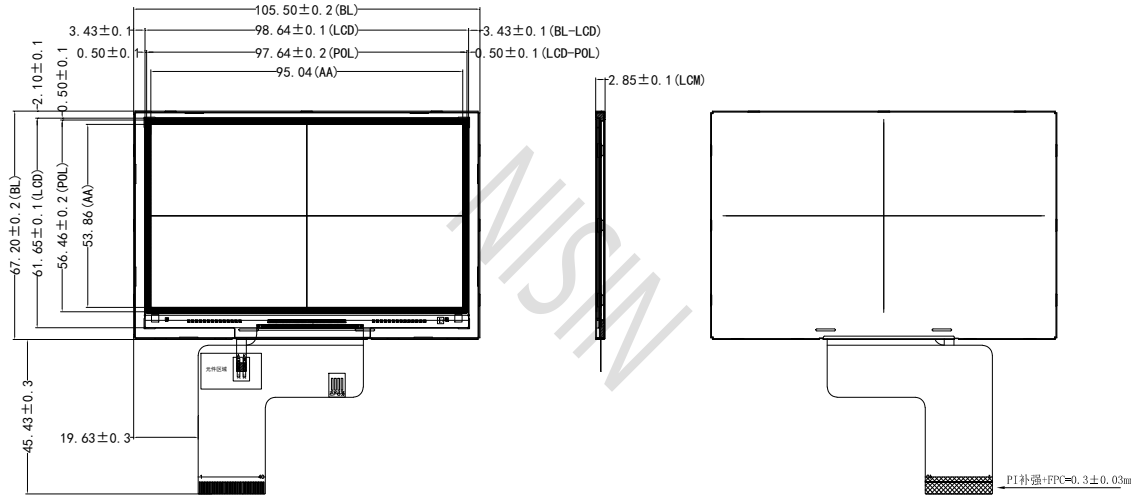

NOTES:

1. DISPLAY TYPE: 4.3" 800*480 ;
2. TFT Driver IC: ST7265 ;
3. OPERATING TEMP: -20°C~70°C,
STORAGE TEMP: -30°C~80°C;
4. BL LED: 10 CHIP-WHITE LED, If=20mA/LED
TFT+CTP Luminance: 实际出样;
White: X: X=实际出样±0.03, Y=实际出样±0.03;
5. * CRITICAL DIMENSION;
6. GENERAL TOLERANCE: ±0.2mm;
7. RECOMMENDED CELLPHONE WINDOW SIZE: 0.3mm
FROM LCD A. A AREA ;
8. RoHS:

No	PIN NAME
1	K
2	A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYSN
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

REVISION RECORD		DATE	SHENZHEN NISIN OPTOELECTRONICS CO., LTD			
△			DRAW TYPE. :		DRAW NO. : NS430LW4001AL	
△			ASSY-Outline		Ver. : V00	SCALE : N.T.S.
△			DRAWN	RCY	DATE 2024.8.28	UNIT : mm
△			CHECKED		DATE	PRO.(3):
△			APPROVED		DATE	SHEET : 1/1