2.产品图纸（Product Drawings）

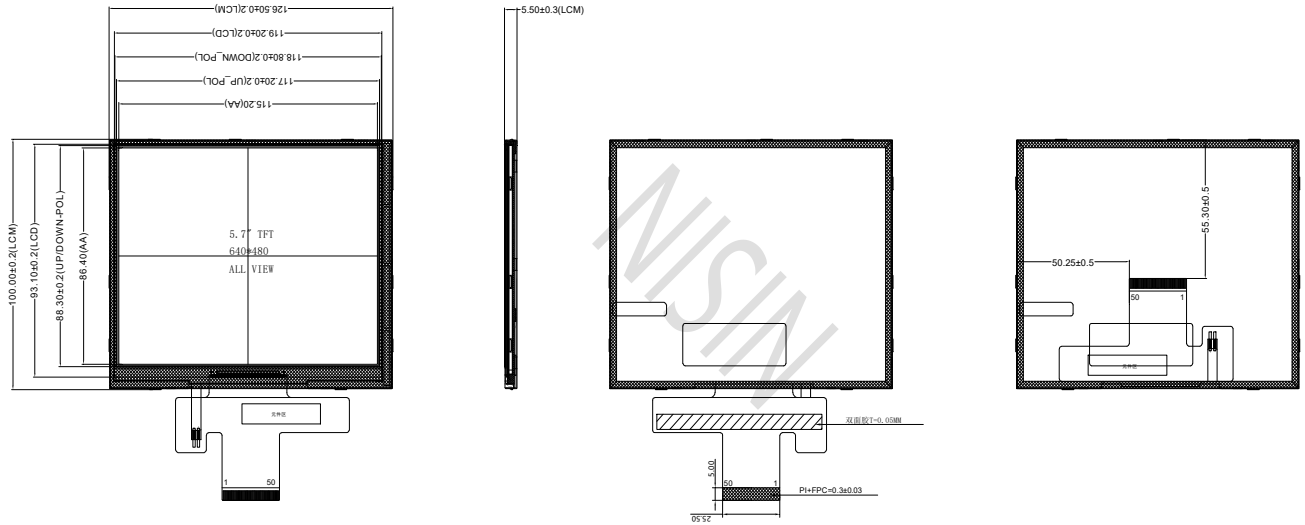

TFT-PIN

NO.	Pin name	NO.	Pin name
1	BL_A	26	G1
2	BL_A	27	G0
3	BL_K	28	R7
4	BL_K	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DVDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

CTP-PIN

PIN	Logic
1	SDA
2	SCL
3	RST
4	INT
5	VDD
6	GND

NOTES:
1. DISPLAY TYPE: 5.7", TFT LCD
2. DISPLAY MODE: Normally Black
3. VIEWING DIRECTION:ALL
4. DRIVER IC:JD9168S
5. LCM :
   Center point Brightness: TBD
   Chromaticity: X:TBD Y:TBD
6. BACK LIGHT: 21 chip white LED If=140mA,Vf=9.0V~9.6V
7. OPERATING TEMP: -20°C TO 70°C,STORAGE TEMP: -30°C TO 80°C



IF=140MA, Vtyp. =9V, Vmax. =9.6V

REVISION RECORD	DATE
1	
2	
3	
4	
5	
6	

NISIN SHENZHEN NISIN OPTOELECTRONICS CO., LTD

DRAW TYPE. : ASSY-Outline		DRAW NO. :NS570LV5001AL	
		Ver. : V00	SCALE : N.T.S.
DRAWN		DATE 20241214	UNIT : mm
CHECKED		DATE	PRO.(3):
APPROVED		DATE	SHEET : 1/1

NISIN
RoHS